


TFE LUBRICANT

DRY RELEASE

PRODUCT NO. 810

TEFLON® LUBRICANT and RELEASE AGENT

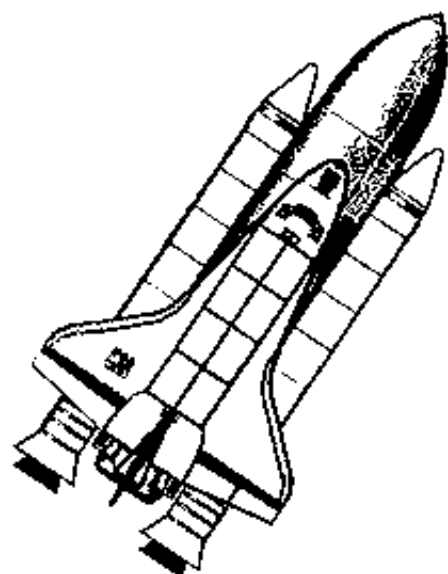

**SPACEAGE
LUBRICATION
MORE SLIPPERY
THAN SILICONE!**

- OIL FREE
 - GREASELESS
 - CHEMICALLY INERT
-
- AUTHORIZED BY U.S.D.A.
 - NON-STAINING and FAST DRYING
 - HEAT STABLE FROM -100°F to +500°F
 - CONTAINS NO CHLORINATED SOLVENTS

**USE ON: Hinges, Rollers, Dies, Fittings, Production Machinery,
Rollers, Conveyors, Cutters, Binders, Punch Presses.**



Gold Coast Chemical PRODUCTS
...A STEP AHEAD

A DIVISION OF DORA INDUSTRIES, INC.

TFE LUBRICANT DRY RELEASE

aerosol
product
data
sheet

TEFLON® LUBRICANT and RELEASE AGENT

Description

A chemically inert, non-oily, fast drying lubricant and release agent containing an extremely fine Teflon® powder. Features outstanding microscopic film forming properties, more slippery than silicone. Provides superior friction reduction in all metal on metal, rubber on metal and metal on plastic applications.

Teflon® is a registered trademark of E.I. DuPont de Nemours & Co., Inc.

For Use by

BOTTLING PLANTS • DAIRIES
PROCESSING & PACKAGING PLANTS
MANUFACTURING PLANTS
MAINTENANCE DEPARTMENTS
ASSEMBLY OPERATIONS

Safe On

PLASTIC • ALUMINUM
RUBBER • GLASS
WOOD • PAPER
METAL

Features

NON-OILY • FAST DRYING LUBRICANT
OUTSTANDING MICROSCOPIC FILM FORMING PROPERTIES
WORKING TEMPERATURE RANGE -100°F TO +500°F
ODORLESS • STAINLESS COATING
MORE SLIPPERY THAN SILICONE, GRAPHITE OR OIL.

Specifications

Appearance and Odor	Clear Liquid, Solvent Odor
Flash Point of Concentrate	49°F(T.O.C.)
Flammability	Extremely-Flammable Spray
Specific Gravity	0.720
Propellant.....	Liquefied Petroleum Gas
Spray Pattern	Fan Spray
NFPA Fire Rating.....	Level 3 Aerosol
Packaging	12 x 10oz. Net Wt. Cans per case (16oz. Cans)